



Real-time Mobile TM Data Server & Analyzer Model 3022AP

Features:



- 1- 3 PCM Stream Telemetry Processor
- NEW MD1612AP 0-72 Mbps PCI “all-in-one” Telemetry Processor Card (streaming, burst, packetized)
- Real-time, OS Independent Card Embedded Dynamic Software Decom and EU Processing
- NEW 3rd Gen MD1615AP real-time SHARC® Multi-Stream EU Processor
- ARTM Tier 0/II/III Multi-Band RF & IF Receiver/Demod
- Full featured local & network Display & Analysis
- Modular and extendable TM Data Services - per decom module
- Real-time Raw and Processed Mission Data Recording, CH 10 format Compliant Data Products
- World Class 8 bps - 72 Mbps Bit Synchronizers
- Multi-Stream Dynamic 64 Mbps PCM Simulator/Encoder
- Card Embedded Windows Independent Low Latency CVSD
- Supports use of Multiple Monitors - Dual Display Options

General Description


The Model 3022AP is a third generation portable, low-latency multi-stream telemetry data processing and analysis unit. Based on Intel Core i7 motherboard technology, its PC chassis provides the ideal platform with which to host Acroamatics’ signature low-latency, card embedded multi-function telemetry processing cardsets.

Modular and extendable to suit a variety of project or matrixed organization telemetry processing needs, the Model 3022AP provides the same set of integrated data decommutation, EU conversion, and data output formatting methods used in Acroamatics’ line of high performance range control center and low-latency range safety telemetry data server lines.

Featuring from one to three of Model 1612AP real-time single card telemetry modules, the 3022AP offers rugged design, very light weight, and a 17” 1920-1080 high resolution display specifically designed to support long-term field and lab portable test applications. Operating under Windows 7 64-bit system OS, the card embedded Model 3022C telemetry processing card suite guarantees that users will have ample processing potential to meet most complex display, recording, and networked data services display and analysis demands.

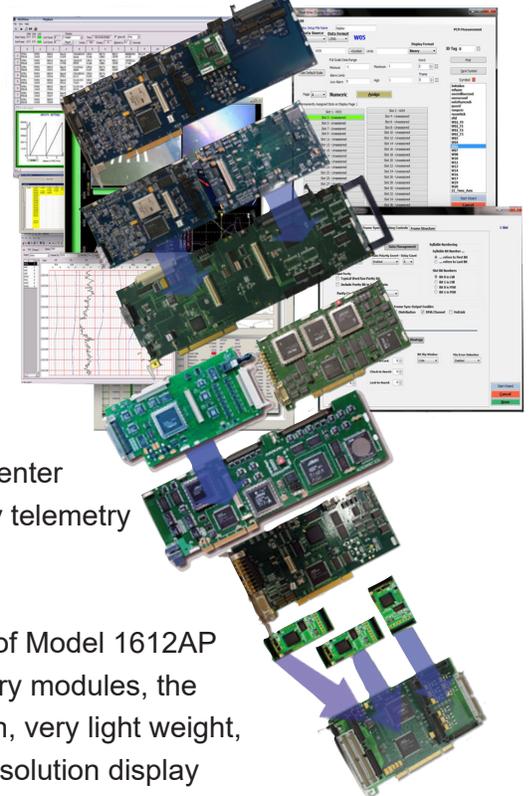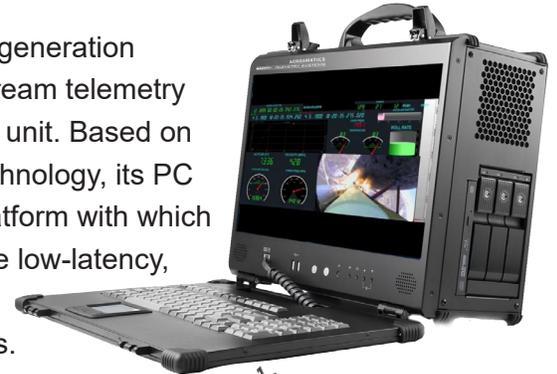

IRIG Chapter 4/5/8/9/10 CVSD TMATS

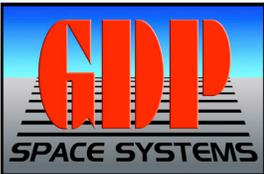


Overview

The 3022AP Telemetry Data Processor (TDP) delivers ample processing power to meet the most demanding portable system real-time mission data display, recording and networked data distribution requirements. Each unit is built specifically to accommodate Acroamatics' Windows application independent telemetry processing cardset solutions. It meets requirements ranging from single stream instrumentation engineering lab to multi stream range data center telemetry server configurations. System configurations are scalable to accommodate applications ranging from the simple quick-look to the most extreme conditional format switch and frame embedded processing and data reformatting situations. The base functional capabilities of the Model 3022AP include low latency IRIG Class I & II PCM decommutation, integrated card embedded low-latency EU processing, recording, display and quick-look analysis, and networked data services.

System Software

Acroamatics Telemetry Software Suite (ATSS) TDP system software includes GUI applications to set up and operate the range of system hardware configurations available. Operators can store and instantly configure the system using project setup libraries managed by ATSS, or alternatively use convenient TMATS, Excel or TDP script file editors to define their own mission support operations from the Mission Console menu, or can control individual TDP functions through specific GUI tools, such as the Data Recording GUI.

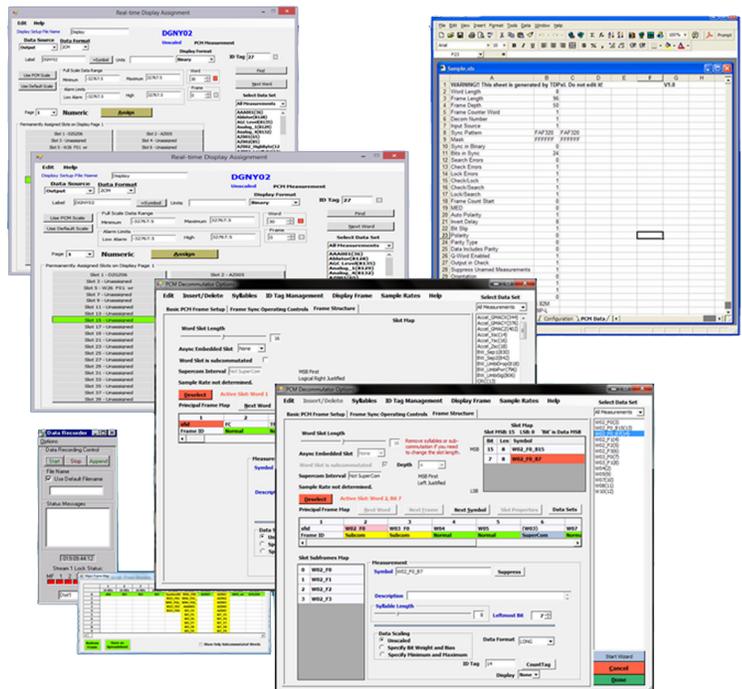

PCI Chassis

The standard Model 3022AP is based on a purpose-designed, rugged and lightweight "lunchbox" style portable "all-in-one" PCI chassis configured to specifically meet the demands of rigorous T&E TM groundstation & portable control room applications. Lightweight and shock resistant, the Model 3022AP features lightweight and corrosion resistant all metal construction, with edge protection and durable industrial carry handles and connector fasteners. Its standard features include a large 17.1" built-in high resolution/brightness display panel, integral full size keyboard, removable HDD and optional high capacity flash system storage, a rugged internal card cage, and enhanced thermal management. Standard system options include a wide variety of disk storage configurations, RAM configuration, and standard high performance i7 Core ATX processing card. For applications requiring just one or two slots to accommodate data interface requirements, compact (1u & 2u) Single-Stream Telemetry Data Processor chassis to our Model 4022 Compact Telemetry System are alternatives which may be considered to meet your needs more economically. See product data sheets for more information.

PCI Telemetry Cards

Acroamatics cards can process anything from a single PCM stream to eight streams of complex telemetry data simultaneously in a single TDP chassis, and now include new generation integrated high performance RF receiver/demod PCI module. The following descriptions of the functions supported by the individual cards is summary in nature only.

Refer to specific module data sheets for complete capabilities descriptions. Assistance prior to ordering is recommended to ensure proper configuration.



NEW Model 1612AP PCI PCM Data System

The new Model 1612P replaces the 1602P. It's a "Drop-in" replacement that includes important new functional capabilities and processing power improvements over the 1602P. Like the 1602P, the 1612P is a powerful, self-contained stored program "programmable software decom" card level PCM frame synchronizer and data decommutator, delivering real-time

decommutation and processing power in a true, Windows free real-time processing environment. It handles the most complex conditional, format switched, stream embedded capable, high rate stream decom and output processing requirements. It utilizes user defined micro-coded "soft-decom" processing techniques run within card resident real-time processors to provide six sub-frame decommutators, each with dual buffered memories for execution of instructions and data processing algorithms with absolute determinism and timing correlations. The data rate has increased to 40 Mbps, and has a powerful onboard programmable simulator, 8 channel DAC, and other new capabilities have been added to the 1612P. It is designed to host the powerful 474DM PCM Bit Synchronizer module and the 470M Time Code Generator/Translator, as needed, allowing the 1612P to deliver better performance for a lower price.

NEW Model 1615AP PCI Programmable Data Stream Processor and Data Distribution Module

Another recently upgraded component of Acroamatics' low-latency telemetry processing architecture is The Model 1615P. The new 1615P allows merging and processing of data from up to eight Model 1612P decom modules, including IRIG time, network fed, HOTLink, PCI, and networked external inputs. It supports low-latency complex data merging and distribution, outputs multiple data products via dedicated card resident network interfaces, and provides low latency / real-time processing of data using its on-board SHARC® DSP embedded processor. A library of over 300 telemetry algorithms is provided, sequential algorithm chaining and derived "if-then-else" processing is supported, as is processing of user-defined expressions.

See the Model 1615P product data sheet or request supporting technical literature for more details.

NEW Model 1611AP PCI 40 MHz Advanced Digital Bit Synchronizer

This state-of-the-art Advanced Digital Bit Synchronizer features tunable data rates from 8 Hz to 40 MHz for all codes, supports all IRIG standard and randomized codes, and provides "best-in-class" bit error, jitter, and sync retention performance. Error performance is well below 1 dB of theoretical - typically in the 0.5 to 0.25 db range. Optional features include: Viterbi encoding/decoding, full featured Bit Error Rate Tester (BERT) and PCM Format Verifier/Error Rate Test analysis options.

See 1611P data sheet for details.

NEW Model 470M Time Code Generator/Translator Mezzanine

The Model 470M is a mezzanine card that converts amplitude modulated IRIG time code signals to a digital representation for downstream analysis. It combines time code translation, generation and format simulation on a single plug-on mezzanine module. The card also generates an amplitude modulated serial IRIG A, B, or G output for use by external equipment, and a slow code output for annotating strip charts. The Model 470M mezzanine can be attached to the 1612AP card.

See the product data sheet for more information.

NEW Model 474DM 40 MHz Bit Synchronizer Mezzanine

The 474DM PCM Bit Synchronizer is a state-of-the-art Bit Synchronizer featuring tunable data rates from 8 Hz to 40 MHz in ALL codes. The card contains selectable input sources, AGC and DC restoration circuitry, and programmable digital filtering for optimum data recovery. Sophisticated PLL (phase-locked loop) circuitry synchronizes a clock to the incoming signal to extract digital data from input PCM stream data. It provides bit sync performance and noise specifications comparable to full size PCI card and the best range chassis based units, using Acroamatics Advanced Digital elements similar to the high performance Model 1611AP, but sized to attach to the new Model 1612AP, 1622P, and 1626P modules to deliver single slot TM stream processing solutions.


Model 482M D to A Converter Mezzanine (Companion to Model 1615AP PDSP)

Model 482M is a mezzanine card for the PCI-bus Model 1615P. Two configurations are available. Model 482M-8 provides a total of 8 channels of 12-bit D-to-A output. Model 482M-32 provides a total of 32 channels of 12-bit D to A output plus 16 channels of 12-bit A-to-D input with a 400 KHz sample rate.

See the product data sheet for more information.

NEW Model RDM-206 LL/UL/S/C Band Receiver Module

Now available within the Model 2900 TDP family product line is a new, affordable, off-the-shelf PCI card based line of integrated RF Receiver/Demod cards. Evolved from our GDP Space sister division's over two decades of experience in the satellite receiver marketplace, the RDM206 supports Tier 0/II/III demodulation, delivering the best compact telemetry receiver performance technology available today in a modular, single card PCI format solution.

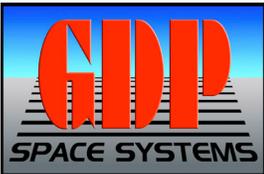

Specifications

Physical	14.05" x 16.46" x 6.96" (H x W x D) / and under 19 Lbs., with cards
Display	17.3", 16:9 Display, 1920 x 1080 Resolution, 300 cd/m2 Brightness
Backplane	4x PCI, 1x Mini PCI-E 2.0 Slot
Processor	Intel Core™ i7-3770K Ivy Bridge 3.5 GHz, Quad Core
Networking	Dual Ethernet 10/100/1000
USB	10x USB 2.0 (6 rear panel & 4 internal header mounted)
Memory	16 GB (min) DDR3 SDRAM
Storage	Options to 3 x 3.5" HDD for up to 12TB, or Flash to 480 GB/drive
Power	600W, 100-240V, 47-63 Hz, 80PLUS Power Supply
DVD	Slim slot-loading DVD burner/Slim Blu-ray player indicators
Signal I/O	Multi-pin mini-D, with BNC female conversion cables provided (standard 10" length)
O/S	Windows 7 Pro, 64-Bit, with DOD STIG compliant configuration compliance
Environmental	Shock 6G, Non-operating 50G
	Vibration Operating 0.5G, 5 to 2000 Hz, Non-Operating 1.2G, 5 to 500 Hz
Temperature	Operating 0 to 40 C°, Non-Operating -40 to 86° C



Software Included

Acroamatics Telemetry Software Suite (ATSS) software set-up and operating environment is provided installed in each TDP system as the integrated operations hub of your new TDP system. ATSS consists of a closely integrated pre-mission TDP system set-up program (TDPSet), TDP Mission Operator Console (MOC) set-up and desktop operations "environment", and various real-time system editing (e.g. bit sync & decom "tweaking"), control tools (recorder & networking control panel), and various console display editing and system management utilities.

Custom Configurations and Special Designs

Acroamatics has the hardware and software expertise necessary to solve even the most complex problems. Our system and card level product capabilities allow us to quickly and effectively design new or modify existing card level modules in response to individual requirements and evolving range and aircraft testing standards. Third party aircraft data busses, receivers, graphics, modules and a wide variety of software application tools are accepted by the Model 2900AP with no special modifications. Acroamatics is an experienced integrator of large multi-vendor systems, with facilities and expertise to assemble, test, and deliver solutions specifically tailored to your needs.

Customer Service

When you call Acroamatics for support you won't have to work your way through an automated system or an anonymous help desk. You'll be connected directly to the engineers and programmers who designed your system to quickly resolve problems.

Why Acroamatics

Over thirty years of experience, far-ranging expertise, excellent products, and outstanding support make Acroamatics not just a telemetry system supplier, but a partner you can rely on to meet your needs.